

Product technical sheet

STEEL 0211-1



3 - 14 years



78 kids



160 m²



Material specification

- Hot-dip galvanized and powder coated or powder galvanized and powder coated steel construction of 80 x 80 mm profile,
- Platforms and climbing walls made of durable anti-slip and waterproof plywood or HPL plate,
- Roofs, side panels made of durable HDPE or HPL plate, resistant to weather conditions,
- Slides made of stainless steel with durable HDPE or HPL side panels,
- Tubular sled made of stainless steel,
- Double wall tube passage made of polypropylene,
- Durable climbing stones made of polyester resin composite with mineral fillers,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Hot-dip galvanized and powder coated steel bars,
- Grips made of synthetic material,
- Screws covered with plastic caps and/or stainless steel screws,
- Safe end caps on top of the structure made of rubber or polypropylene,



Facilitating disability



easy access



integration



Physical development



balance



hiding



sliding



pull-up



passage



climbing



crawling





9
number of towers



3
number of slides



8
number of roofs



2
number of interactive elements



18
number of activity elements

Product technical sheet

STEEL 0211-1




Product data

Length	1145 cm
Width	910 cm
Total height	409 cm
Age group	3 - 14 years
Number of users	78 kids
Safety zone	160 m ²
Free fall height	210 cm
The height of the platforms	35, 59, 90, 120, 150, 180, 210 cm
In accordance with norm EN	1176-1:2017+A1:2023
Weight of the heaviest part	130 kg
Dimensions of the largest part	12x249x88 cm
Availability of spare parts	YES
Installation time	21 h
Color options	

Data is subject to change without prior notice.

Additional information

- equipment adapted for the disabled; intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- slide should not be installed southwards;
- render is for reference only, the actual appearance of the equipment and its color may vary;

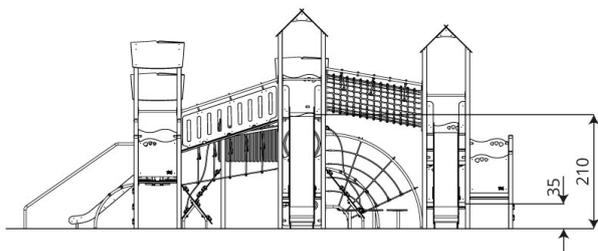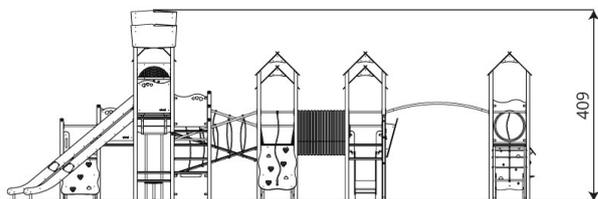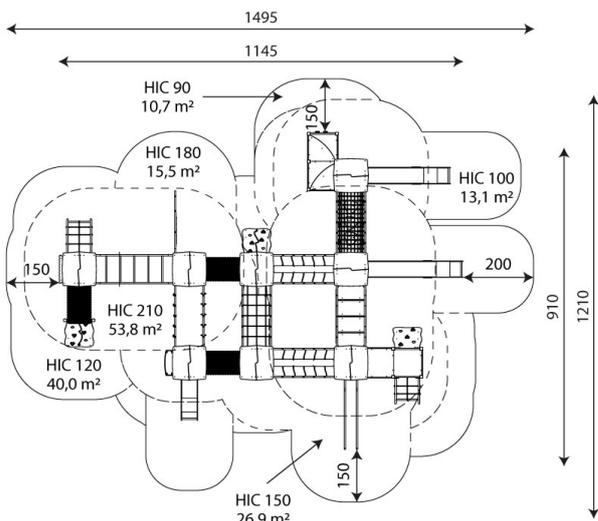

Guarantee

30 30 year guarantee - Durability of steel and stainless steel structural elements

15 15 year guarantee - Durability of steel and stainless steel structures of mobile devices; durability of Robinia wood structural elements

10 10 year guarantee - Structural strength of HDPE, 100% recycled HDPE and HPL elements; structural elements made of 100% recycled material (composite)

5 5 year guarantee - Corrosion resistance of stainless steel and hot-dip galvanized and powder-coated steel elements, resistance to bark beetles and rotting of wooden structural elements

Detailed information in the guarantee card

Vinci Sp. z o.o.
Seminaryjna 9 Street
99-400 Łowicz

VAT: 534-265-18-84
PHONE: +48 42 203 24 99 ext. 26
M: +48 793 404 991



biuro@vinci-play.com
info@vinci-play.com
www.vinci-play.com

Surfaces according to EN 1176-1:2017+A1:2023

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		210

Product technical sheet

STEEL 0211-1

Amount of safe surface corresponding with free fall height:

HIC 90	10,7 m ²
HIC 100	13,1 m ²
HIC 120	40,0 m ²
HIC 150	26,9 m ²
HIC 180	15,5 m ²
HIC 210	53,8 m ²

Data is subject to change without prior notice.

