

# CASTILLO 3045-1



4 - 14 years



198 kids



174,3 m<sup>2</sup>



## Material specification

- Powder galvanized and powder coated or stainless steel construction of 80 x 80 mm profile,
- Platforms and climbing walls made of durable anti-slip and waterproof HPL plate,
- Roofs and side panels made of durable HDPE plate, resistant to weather conditions,
- Transparent polycarbonate panels with a weather-resistant print,
- Covers made of hot-dip galvanized and powder coated steel mesh,
- Slides made of stainless steel with durable HDPE side panels,
- Tubular sled made of stainless steel,
- Stainless steel tube slide,
- Drawing board made of durable HPL plate, resistant to weather conditions,
- Maze windows made of polycarbonate, balls made of synthetic material,
- Durable climbing stones made of polyester resin composite with mineral fillers,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Attested, safe seats,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel bars, ladders and handrails,
- Stainless steel screws and/or screws covered with plastic caps,
- Safe end caps on top of the structure made of rubber or polypropylene,



### Facilitating disability



easy access



shelters



integration



### Intellectual development



manipulation



music



thinking



### Physical development



balance



hiding



sliding



rest



passage



climbing



roofs





**3**  
number of towers



**5**  
number of slides



**17**  
number of roofs



**12**  
number of interactive elements



**19**  
number of activity elements

**Product technical sheet**

**CASTILLO 3045-1**

**Product data**


Length	1530 cm
Width	1520 cm
Total height	955 cm
Age group	4 - 14 years
Number of users	198 kids
Safety zone	174,3 m2
Free fall height	270 cm
The height of the platforms	90, 120, 150, 180, 210, 240, 270, 300, 330, 360, 420, 450, 480, 510, 540, 570, 600, 630, 690 cm
tube slide platform height	360, 570 cm
slide platform height	90, 180, 210 cm
In accordance with norm EN	1176-1:2017+A1:2023
Weight of the heaviest part	210 kg
Dimensions of the largest part	8x8x585 cm
Availability of spare parts	YES

Color options

Data is subject to change without prior notice.

**Additional information**

- equipment adapted for the disabled; intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70 cm deep;
- slide should not be installed southwards;
- render is for reference only, the actual appearance of the equipment and its color may vary;

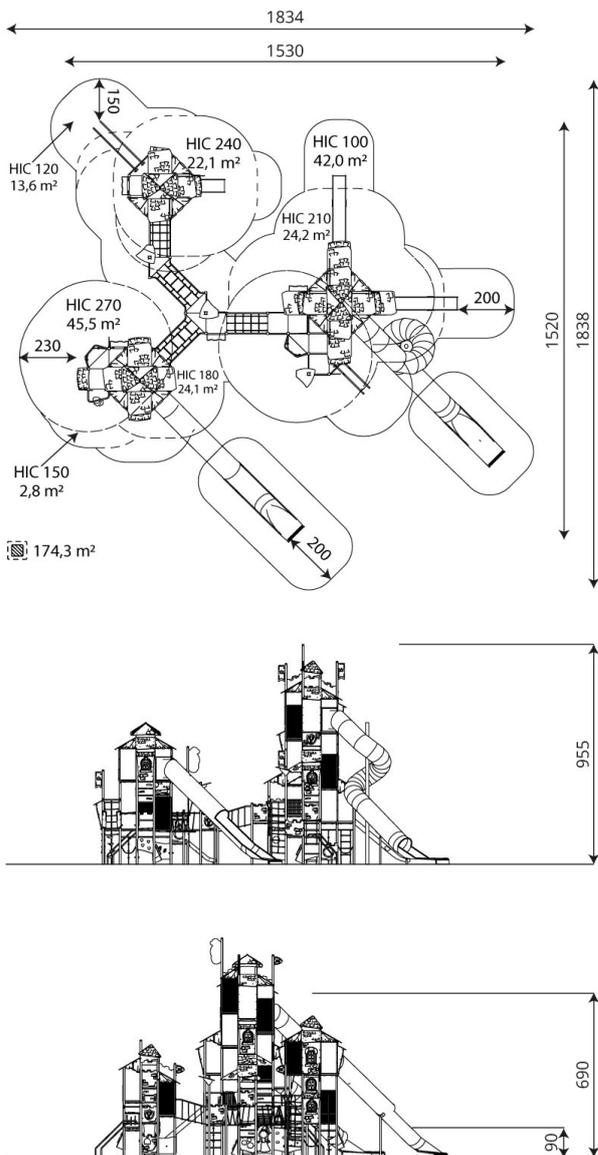

**Guarantee**

**30** 30 year guarantee - Durability of steel and stainless steel structural elements

**15** 15 year guarantee - Durability of steel and stainless steel structures of mobile devices; durability of Robinia wood structural elements

**10** 10 year guarantee - Structural strength of HDPE, 100% recycled HDPE and HPL elements; structural elements made of 100% recycled material (composite)

**5** 5 year guarantee - Corrosion resistance of stainless steel and hot-dip galvanized and powder-coated steel elements, resistance to bark beetles and rotting of wooden structural elements

Detailed information in the guarantee card

Vinci Sp. z o.o.  
Seminaryjna 9 Street  
99-400 Łowicz

VAT: 534-265-18-84  
PHONE: +48 42 203 24 99 ext. 26  
M: +48 793 404 991



biuro@vinci-play.com  
info@vinci-play.com  
[www.vinci-play.com](http://www.vinci-play.com)

## Surfaces according to EN 1176-1:2017+A1:2023

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		270

## Product technical sheet

# CASTILLO 3045-1

### Amount of safe surface corresponding with free fall height:

HIC 100	42,0 m <sup>2</sup>
HIC 120	13,6 m <sup>2</sup>
HIC 150	2,8 m <sup>2</sup>
HIC 180	24,1 m <sup>2</sup>
HIC 210	24,2 m <sup>2</sup>
HIC 240	22,1 m <sup>2</sup>
HIC 270	45,5 m <sup>2</sup>

Data is subject to change without prior notice.

