



Product technical sheet

RECYCLED RC1465



7 - 16 years



6 kids



20.2 m²

Material specification

- The structure is made of a durable, moisture-resistant and low-temperature recycled composite,
- Stainless steel ladders,
- Stainless steel screws and/or screws covered with plastic caps,



Physical development






pull-up





1
number of activity elements

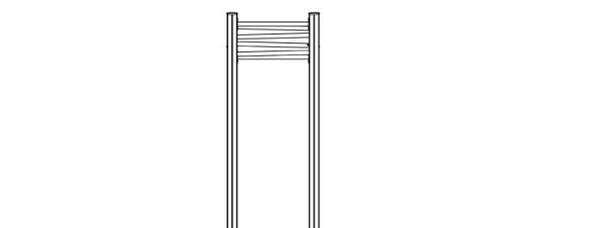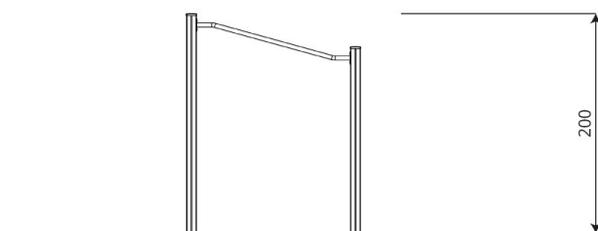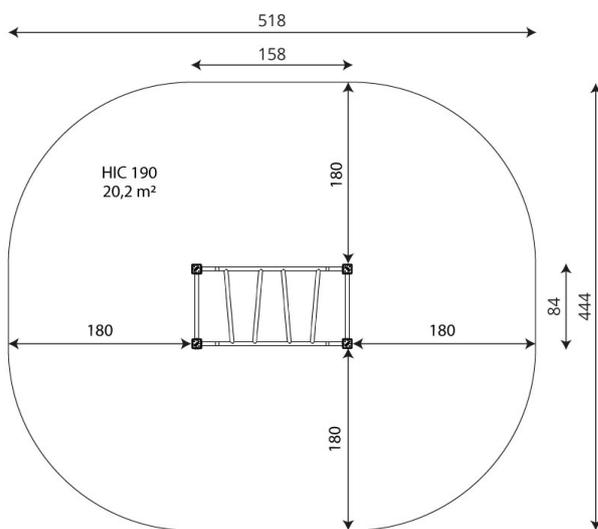

Product technical sheet

RECYCLED RC1465

Product data

| | |
|--------------------------------|---------------------|
| Length | 158 cm |
| Width | 84 cm |
| Total height | 200 cm |
| Age group | 7 - 16 years |
| Number of users | 6 kids |
| Safety zone | 20.2 m2 |
| Free fall height | 190 cm |
| In accordance with norm EN | 1176-1:2017+A1:2023 |
| Weight of the heaviest part | 11 kg |
| Dimensions of the largest part | 189x9x9 cm |
| Availability of spare parts | YES |
| Installation time | 2 h |

Data is subject to change without prior notice.

Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

Guarantee

30 30 year guarantee - Durability of steel and stainless steel structural elements

15 15 year guarantee - Durability of steel and stainless steel structures of mobile devices; durability of Robinia wood structural elements

10 10 year guarantee - Structural strength of HDPE, 100% recycled HDPE and HPL elements; structural elements made of 100% recycled material (composite)

5 5 year guarantee - Corrosion resistance of stainless steel and hot-dip galvanized and powder-coated steel elements, resistance to bark beetles and rotting of wooden structural elements

Detailed information in the guarantee card



Surfaces according to EN 1176-1:2017+A1:2023

| | Description (mm) | Layer thickness (cm) | Maximum fall heights (cm) |
|---------------------------------|------------------------------|----------------------|---------------------------|
| Turf/ top layer of soil (A,B,C) | - | - | ≤100 |
| bark (A,C) | Particle size from 20 to 80 | 30 | ≤200 |
| | | 40 | ≤300 |
| woodchips (A,C) | Particle size from 5 to 30 | 30 | ≤200 |
| | | 40 | ≤300 |
| sand or gravel (A,C) | Particle size from 0,25 to 8 | 30 | ≤200 |
| | | 40 | ≤300 |
| synthetic attested (A,B,C) | Tested according to EN 1177 | | 190 |

Product technical sheet

RECYCLED RC1465

Amount of safe surface corresponding with free fall height:

HIC 190 20,2 m²

Data is subject to change without prior notice.

