



**Product technical sheet**

**SWING ST0519-1**



3 - 14 years



3 kids



71,1 m<sup>2</sup>

**R1**



**R3**



**R18**



**Material specification**

- Hot-dip galvanized and powder coated or powder galvanized and powder coated steel construction,
- Attested, safe seats,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel swing fittings,
- Stainless steel screws and/or screws covered with plastic caps,



**Physical development**




spinning



rocking



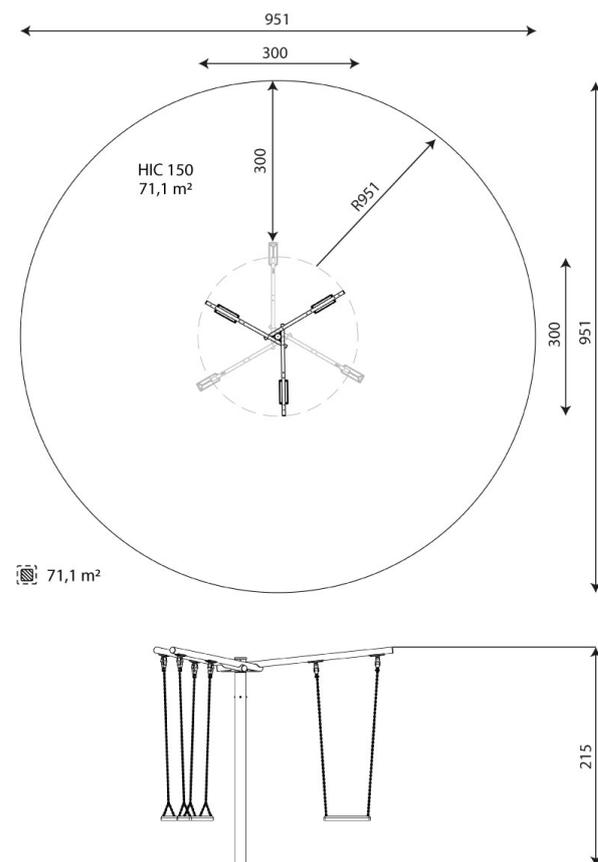

## Product technical sheet

# SWING ST0519-1

### Product data

Length	300 cm
Width	300 cm
Total height	215 cm
Age group	3 - 14 years
Number of users	3 kids
Safety zone	71,1 m <sup>2</sup>
Free fall height	150 cm
In accordance with norm EN	1176-1:2017+A1:2023
Weight of the heaviest part	31,0 kg
Dimensions of the largest part	309x11x11 cm
Availability of spare parts	YES
Installation time	1 h
Color options	

Data is subject to change without prior notice.

### Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- available types of seats in the swing: R1-flat, R3-flat belt;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

### Guarantee

**30**

30 year guarantee - Durability of steel and stainless steel structural elements

**15**

15 year guarantee - Durability of steel and stainless steel structures of mobile devices; durability of Robinia wood structural elements

**10**

10 year guarantee - Structural strength of HDPE, 100% recycled HDPE and HPL elements; structural elements made of 100% recycled material (composite)

**5**

5 year guarantee - Corrosion resistance of stainless steel and hot-dip galvanized and powder-coated steel elements, resistance to bark beetles and rotting of wooden structural elements

Detailed information in the guarantee card



# SWING ST0519-1

## Surfaces according to EN 1176-1:2017+A1:2023

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		150

### Amount of safe surface corresponding with free fall height:

HIC 150 71,1 m<sup>2</sup>

Data is subject to change without prior notice.

