



Product technical sheet

TOPICCO WD1534



3 - 14 years



39 kids



49,4 m²



Material specification

- Construction made of the highest quality laminated, impregnated and double coated pine wood 90 x 90 mm without knots, secured from the top with polypropylene plugs,
- Metal anchors made of hot dip galvanized steel, protecting the wood from direct contact with the ground to prevent rot and to extend the product's life,
- Platforms made of durable anti-slip and waterproof plywood or HPL plate,
- Side panels made of durable HDPE plate, resistant to weather conditions
- Transparent polycarbonate panels with a weather-resistant print,
- Covers made of hot-dip galvanized and powder coated steel mesh,
- Tube slide made of PE, highly resistant to weather conditions and UV rays,
- Seats made of steel ropes in polypropylene braid, connected with durable elements of aluminum, stainless steel and / or plastic,
- Stainless steel bars,
- Screws covered with plastic caps and/or stainless steel screws,



Facilitating disability



sound stimulation



easy access



shelters



integration



Intellectual development



manipulation



music



thinking



Physical development



hiding



sliding



observation



community



rest



roofs





1
number of towers



7
number of roofs



7
number of interactive elements



1
number of activity elements

Product technical sheet

TOPICCO WD1534


Product data

| | |
|--------------------------------|---|
| Length | 600 cm |
| Width | 585 cm |
| Total height | 630 cm |
| Age group | 3 - 14 years |
| Number of users | 39 kids |
| Safety zone | 49,4 m ² |
| Free fall height | 180 cm |
| The height of the platforms | 59, 90, 120, 150, 180, 210, 270, 330 cm |
| tube slide platform height | 180, 330 cm |
| In accordance with norm EN | 1176-1:2017+A1:2023 |
| Weight of the heaviest part | 46 kg |
| Dimensions of the largest part | 570x9x9 cm |
| Availability of spare parts | YES |
| Installation time | 11 h |

Data is subject to change without prior notice.

Additional information

- equipment adapted for the disabled; intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- slide should not be installed southwards;
- render is for reference only, the actual appearance of the equipment and its color may vary;

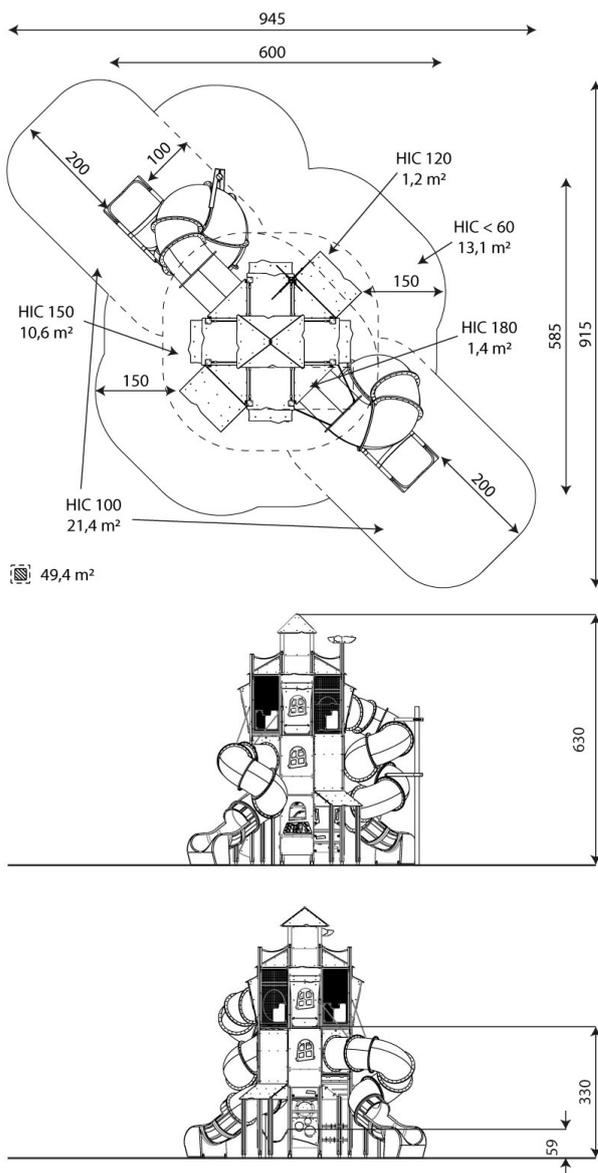

Guarantee

30 30 year guarantee - Durability of steel and stainless steel structural elements

15 15 year guarantee - Durability of steel and stainless steel structures of mobile devices; durability of Robinia wood structural elements

10 10 year guarantee - Structural strength of HDPE, 100% recycled HDPE and HPL elements; structural elements made of 100% recycled material (composite)

5 5 year guarantee - Corrosion resistance of stainless steel and hot-dip galvanized and powder-coated steel elements, resistance to bark beetles and rotting of wooden structural elements

Detailed information in the guarantee card

Vinci Sp. z o.o.
Seminaryjna 9 Street
99-400 Łowicz

VAT: 534-265-18-84
PHONE: +48 42 203 24 99 ext. 26
M: +48 793 404 991



biuro@vinci-play.com
info@vinci-play.com
www.vinci-play.com

Surfaces according to EN 1176-1:2017+A1:2023

| | Description (mm) | Layer thickness (cm) | Maximum fall heights (cm) |
|---------------------------------|------------------------------|----------------------|---------------------------|
| Turf/ top layer of soil (A,B,C) | - | - | ≤100 |
| bark (A,C) | Particle size from 20 to 80 | 30 | ≤200 |
| | | 40 | ≤300 |
| woodchips (A,C) | Particle size from 5 to 30 | 30 | ≤200 |
| | | 40 | ≤300 |
| sand or gravel (A,C) | Particle size from 0,25 to 8 | 30 | ≤200 |
| | | 40 | ≤300 |
| synthetic attested (A,B,C) | Tested according to EN 1177 | | 180 |

Product technical sheet

TOPICCO WD1534

Amount of safe surface corresponding with free fall height:

| | |
|---------|---------------------|
| HIC <60 | 13,1 m ² |
| HIC 90 | 1,7 m ² |
| HIC 100 | 21,4 m ² |
| HIC 120 | 1,2 m ² |
| HIC 150 | 10,6 m ² |
| HIC 180 | 1,4 m ² |

Data is subject to change without prior notice.

