

RECYCLED RC1461



3 - 14 years



28 kids



44,7 m²



Material specification

- The structure is made of a durable, moisture-resistant and low-temperature recycled composite,
- Platforms made of durable anti-slip and waterproof plywood or HPL plate,
- The covers are made of recycled HDPE panel, resistant to weather conditions
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Steel springs 20 mm, iron phosphorated and powder coated,
- Stainless steel bars and handrails,
- Screws covered with plastic caps and/or stainless steel screws,



Physical development



balance



pull-up




passage





7
number of activity elements

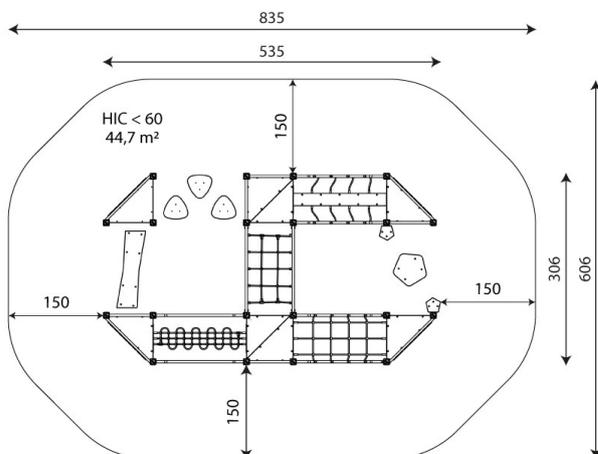

Product technical sheet

RECYCLED RC1461



Product data

Length	535 cm
Width	306 cm
Total height	140 cm
Age group	3 - 14 years
Number of users	28 kids
Safety zone	44,7 m ²
Free fall height	< 60 cm
The height of the platforms	29, 59 cm
In accordance with norm EN	1176-1:2017+A1:2023
Weight of the heaviest part	24 kg
Dimensions of the largest part	159x46x17 cm
Availability of spare parts	YES
Installation time	13 h

Data is subject to change without prior notice.

Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

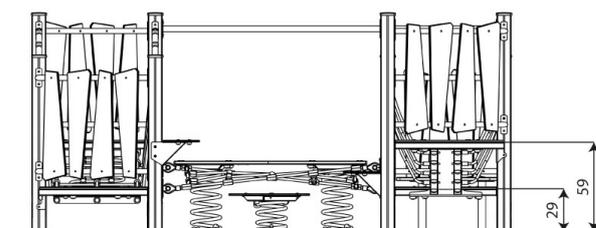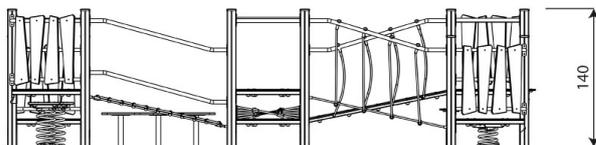

Guarantee

30 30 year guarantee - Durability of steel and stainless steel structural elements

15 15 year guarantee - Durability of steel and stainless steel structures of mobile devices; durability of Robinia wood structural elements

10 10 year guarantee - Structural strength of HDPE, 100% recycled HDPE and HPL elements; structural elements made of 100% recycled material (composite)

5 5 year guarantee - Corrosion resistance of stainless steel and hot-dip galvanized and powder-coated steel elements, resistance to bark beetles and rotting of wooden structural elements

Detailed information in the guarantee card



Surfaces according to EN 1176-1:2017+A1:2023

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		< 60

Product technical sheet

RECYCLED RC1461

Amount of safe surface corresponding with free fall height:

HIC <60 44,7 m²

Data is subject to change without prior notice.

